


# Mega-MINI "LA"



## Mini direct diaphragm valve with pneumatic actuator

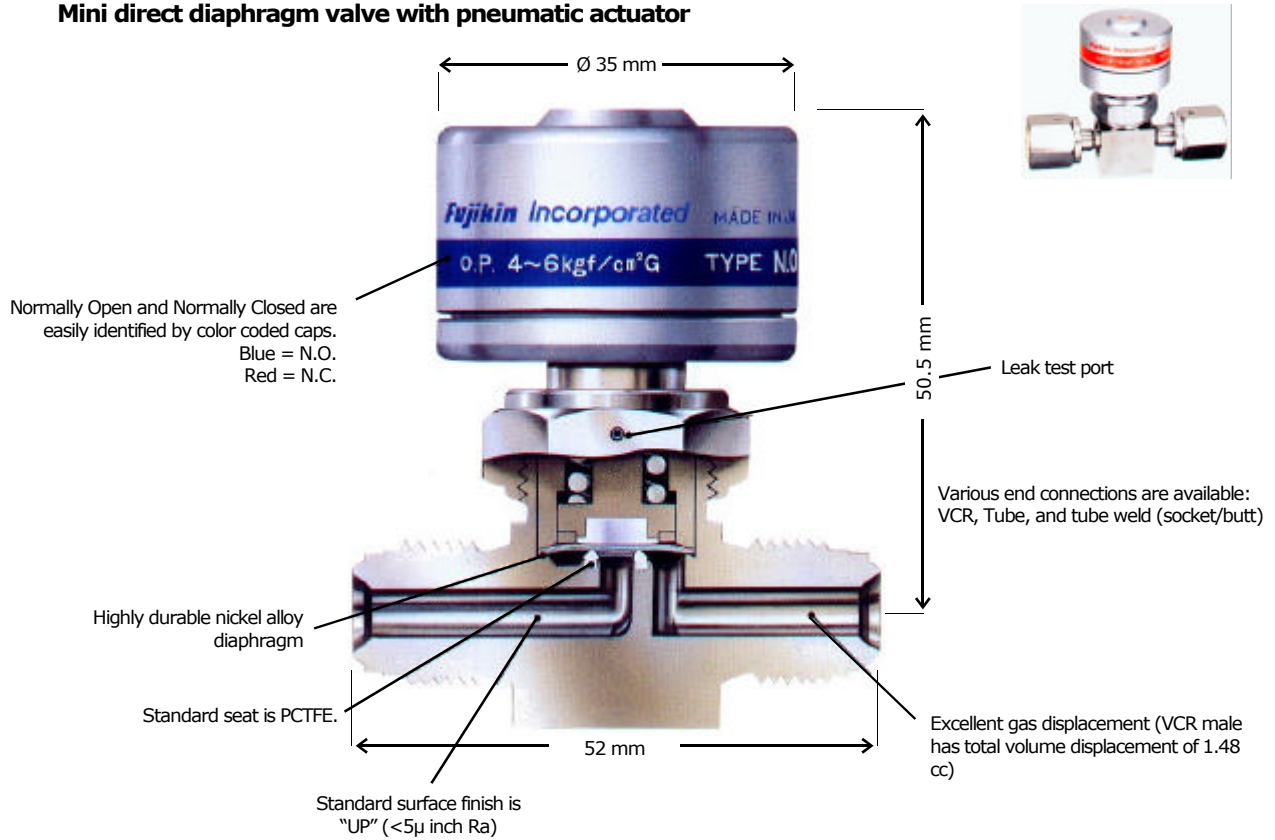

Basic Cat. NO	Type	Nominal dia.	Orifice dia. mm	Fujikin code
HDLA-0001	N.O.	1/4" (6,35 mm) VCR M.	2,5	FP-SD-71-6.35
HDLA-0002	N.C.	1/4" (6,35 mm) VCR M	2,5	FPR-SD-71-6.35
HDLA-0003	N.O.	1/4" (6,35 mm) VCR F.	2,5	FP-SD-71-6.35-2
HDLA-0004	N.C.	1/4" (6,35 mm) VCR F.	2,5	FPR-SD-71-6.35-2
HDLA-0005	N.O.	1/4" (6,35 mm) VCR F./M.	2,5	FP-SD-71-6.35-3
HDLA-0006	N.C.	1/4" (6,35 mm) VCR F./M.	2,5	FPR-SD-71-6.35-3
HDLA-0007	N.O.	1/4" (6,35 mm) VCR M/F/M 3 Way	2,5	FP-SDTB-71-6.35
HDLA-0008	N.C.	1/4" (6,35 mm) VCR M/F/M 3 Way	2,5	FPR-SDTB-71-6.35

### Material

Description	Material
Body	SS 316L
Diaphragm	Nickel Alloy
Seat	PCTFE
Actuator	A6056

### Specifications

Nominal dia. Inch (mm)	Max. operating pressure (psi/bar)	Temp. Range of applicable fluid (°C)	Max Cv value	Supplying pressure (psi/bar)
1/4" (6,35)	142,23 (10)	-10 / 80	0,1	56,89-85,34 (4-6)